



INSTALL IT. BENEFIT FROM
THE RANGE.

Tubolit AR Fonoblok

Improved acoustic comfort for waste
water pipes


- // PE endless insulation for cast iron and plastic waste water pipes
- // Noise reduction up to 15 dB(A) on waste water pipes
- // Full range available up to DN 150
- // Easy application over flanges and elbows including tape



 **armacell**[®]
ArmaLight[™]

INSTALL IT. BENEFIT FROM THE RANGE.

ArmaLight Tubolit

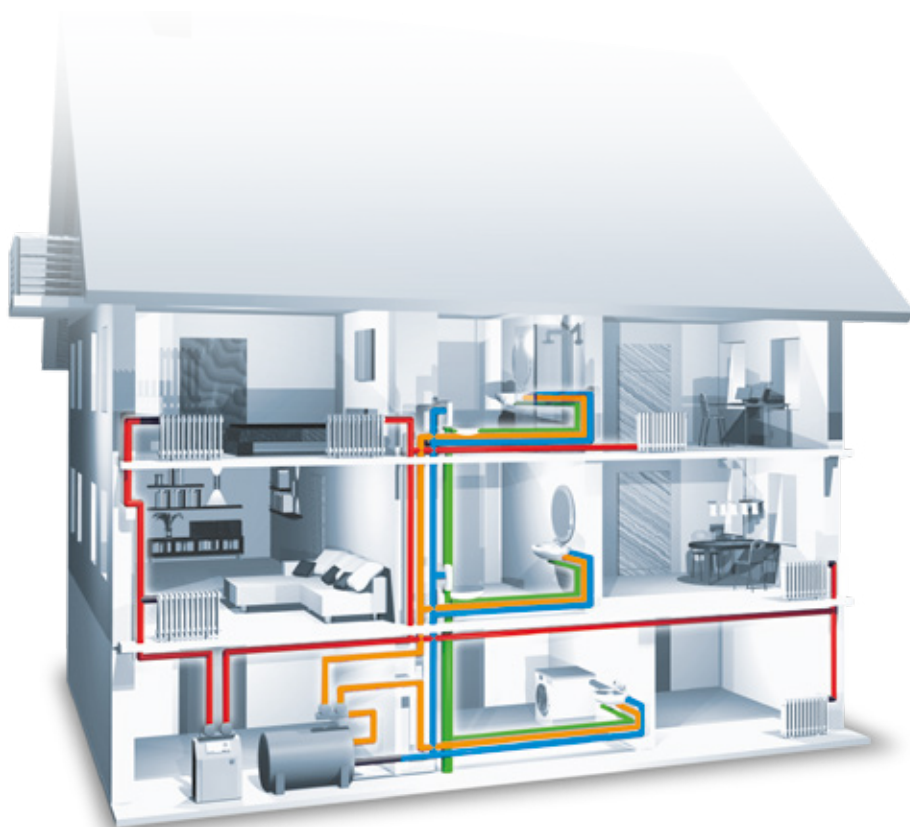

ArmaLight Tubolit saves energy, improves acoustic comfort in buildings and protects pipes installed within the building shell. ArmaLight Tubolit is the most complete range of thermal, acoustical and protective insulation products for installations of heating, domestic hot and cold water and sewage pipes in both residential as well as public and commercial buildings.

— Heating — Domestic hot water
— Cold water pipes — Waste water

Typical application areas

Product	Type of installation				Additional Benefit /Requirement				
	Heating	Domestic hot water	Cold water pipes	Waste water	Extra protection	50% faster application	Noise reduction	Under plaster	Under floor
ArmaLight Tubolit									
DG	•••	•••	••						
DG self-seal	•••	•••	••			✓			
DG-B1	•••	•••	••						
DG Plus	•••	•••	••						
S	•••	•••	••		✓		✓	✓	
S Plus			•••		✓		✓	✓	
DHS Quadra	•••				✓		✓		✓
AR Fonowave				•••	✓		✓		
AR Fonoblok				•••	✓		✓		

TECHNICAL DATA - TUBOLIT AR FONOBLOK

Brief description	Flexible closed cell extruded insulation material to reduce noise and prevent condensation especially on cast iron pipes for waste water, rain water and sewage pipes
Material type	Factory made polyethylene foam (PEF) according to EN 14313.
Additional material information	Self-adhesive coating on tapes: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil.
Product colour range	Blue
Applications	Acoustical and thermal insulation of internal waste water, rain water and sewage pipes in residential and non-residential buildings. For complex and large diameter rain collecting and (roof-) drainage pipes, to provide optimal protection against the risk of condensation, we recommend using ArmaFlex insulation.
Declaration of performance	Declaration of Performance in accordance with Article 7(3) of Regulation (EU) No 305/2011 is available at www.armacell.com/DoP .

Property	Value / Assessment	Standard / Test method						
Operating temperature								
Operating temperature	Maximum temperature: 100°C +85 °C for tapes Minimum temperature: As is usual in plumbing and heating installations	EN 14707, EN 14313						
Thermal conductivity								
Declared thermal conductivity	<table border="1"> <tr> <td>ϑ_m</td> <td>40°C</td> </tr> <tr> <td>$\lambda_d \leq [W/(m \cdot K)]$</td> <td>0.045</td> </tr> <tr> <td>Formula</td> <td>$[41 + 0,1 \cdot \vartheta_m + 0,0008 \cdot (\vartheta_m - 40)^2] / 1000$</td> </tr> </table>	ϑ_m	40°C	$\lambda_d \leq [W/(m \cdot K)]$	0.045	Formula	$[41 + 0,1 \cdot \vartheta_m + 0,0008 \cdot (\vartheta_m - 40)^2] / 1000$	EN ISO 13787, EN ISO 8497
ϑ_m	40°C							
$\lambda_d \leq [W/(m \cdot K)]$	0.045							
Formula	$[41 + 0,1 \cdot \vartheta_m + 0,0008 \cdot (\vartheta_m - 40)^2] / 1000$							
Fire Performance and Approvals								
Reaction to fire	Tubolit AR Fonoblok : E(L) Tubolit AR tape : E	EN 13501-1, EN ISO 11925-2						
Physical attributes								
Dimensions and tolerances	In accordance with EN 14313, table 1 and 2	EN 822, EN 823, EN 13467						
Acoustic performance								
System acoustic insertion loss	on cast iron waste water pipes ≤ 15 dB(A)	EN 14366						
Health and environment								
Volatile organic compounds (VOC) content	Fulfills all VOC requirements (French, Italian, Belgian, German AgBB, Blauer Engel and Eurofins Indoor Air Comfort GOLD).	ISO 16000 Parts 3, 6 & 9						
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "150/2021", Instytut Techniki Budowlanej (ITB)							
Additional features	SCCP, MCCP-free							
Other technical features								
Shelf life	Tapes self-adhesive: 1 year							
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).							

Coil. Blue

Pipe Ø [mm]	Plastic pipe DN (ISO 1452)	Item	Insulation thickness [mm]	Length [m]	Content [metric]	Content [quantity]
57	50	TL-50/5-AR	5	15	135 m	9 roll
64	60	TL-60/5-AR	5	15	120 m	8 roll
76	70	TL-70/5-AR	5	15	105 m	7 roll
89	90	TL-90/5-AR	5	15	75 m	5 roll
108	100	TL-100/5-AR	5	15	75 m	5 roll
133	125	TL-125/5-AR	5	15	60 m	4 roll
160	150	TL-150/5-AR	5	15	45 m	3 roll

Tape – insulation

Item	Description	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
TL-TAPE/50-AR	Tubolit AR Fonoblok Tape (50 mm x 15 m x 3 mm)	3	50	15	12 roll
TL-TAPE/100-AR	Tubolit AR Fonoblok Tape (100 mm x 15 m x 3 mm)	3	100	15	6 roll

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaLight | Tubolit AR Fonoblok | Brochure | 032024 | en-GB

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:
www.armacell.com