




INSTALL IT. TRUST IT.

# AP/ArmaFlex

Insulating mechanical equipment with AP/ArmaFlex is one of the simplest and most efficient measures to save energy, reliably on a long term basis in commercial and residential buildings.

- // Reliable, long-term condensation control
- // Energy efficient
- // Quick, easy and clean installation
- // Professional fire protection
- // Mechanical resistance
- // Low total installed costs
- // Built-in Microban antimicrobial protection reduces mould and bacteria growth

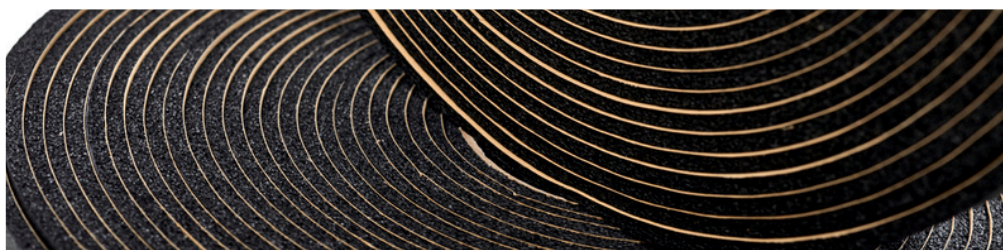

 **armacell**<sup>®</sup>  
ArmaFlex<sup>®</sup>

## TECHNICAL DATA - AP/ARMAFLEX

Brief description	AP/ArmaFlex is a flexible insulation material that reliably protects against water vapour ingress due to its closed-cell structure. No additional water vapour barrier is required.
Material type	Elastomeric foam based on synthetic rubber.
Additional material information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Product colour range	Black
Special features	High flexible closed-cell insulation material especially designed for HVAC/R applications.
Applications	Insulation for piping and ducting associated with heating, ventilation, air conditioning and refrigeration (HVAC-R) systems, Variable Refrigerant Volume (VRV) and Variable Refrigerant Flow (VRF) systems, chillers as well as hot and cold water plumbing systems. Structure-borne noise reduction in service-water and waste-water installations.
Installation	Please refer to the ArmaFlex application manual for advice.

Property	Value / Assessment						Standard / Test method
<b>Temperature range</b>							
Service temperature	Range	Min. °C <sup>1</sup>		Max. °C		ASTM C534 - Grade 1	
	Full range	-50		105			
	Remarks	+85 °C if sheet or tape is glued to the object with its whole surface					
<b>Thermal conductivity</b>							
Declared thermal conductivity	Øm	35				ASTM C518, ASTM C177	
	$\lambda_d \leq [W/(m \cdot K)]$	0.035					
	Formula	$[31 + 0.1 \cdot \varnothing m + 0.0008 \cdot \varnothing m^2]/1000$					
<b>Fire Performance and Approvals</b>							
Surface burning characteristics	25/50 rated						ASTM E84
<b>Fire performance</b>							
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames.						
<b>Resistance to water</b>							
Water absorption	0.2%						ASTM E96, procedure A
<b>Physical attributes</b>							
Dimensions and tolerances	In accordance with ASTM C302-13 (R17)						ASTM C302
<b>Acoustic performance</b>							
Weighted sound absorption coefficient, $\alpha_w$	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
	25mm	0.170	0.320	0.580	0.600	0.480	0.320
	38mm	0.180	0.360	0.800	0.750	0.700	0.410
<b>Weather and UV resistance</b>							
UV resistance <sup>2</sup>	Protection against UV radiation is necessary (see Technical Bulletin no. 142)						
<b>Health and environment</b>							
Volatile organic compounds (VOC) content	Low volatile organic compounds (VOC), Low Total Aldehyde.						
Antimicrobial behaviour	Built-in Microban antimicrobial product protection.						
Environmental aspects	Zero ODP and GWP.						

Property	Value / Assessment	Standard / Test method
<b>Other technical features</b>		
Shelf life	Self-adhesive tapes, self-adhesive sheets, self-adhesive tubes: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

<sup>1</sup>Can be used till -183 °C if required. Contact Armacell Technical Services for more information.

<sup>2</sup>If ArmaFlex is used outdoors or in applications under UV radiation, it should be protected with ArmaFinish Paint, or a covering such as Arma-Chek within 3 days of installation.

# OUR CUSTOMERS EXPECT THE BEST. WE WORK HARD TO GO BEYOND THAT AND EXCEED THEIR EXPECTATIONS.


To offer our customers the best service, we hold stocks of our most popular products. **Lead times and form of delivery may vary per product and per country, and may be affected during peak season and holidays.** We aim to create open lines of communication with our customers, so please contact Customer Services who can answer questions about our service commitment to you.

We are pleased to offer you estimated lead times for our products in Poland. This information is displayed as “availability class” in the range tables of our price lists. **Use this as a guide for your projects.**

- A // Up to 3 working days\*
- B // 4 to 7 working days
- C // 7 - 14 working days
- D // Contact Armacell for details for these non-standard items.

Note:

- From the date shown on the order confirmation.
- This is a guide and not binding

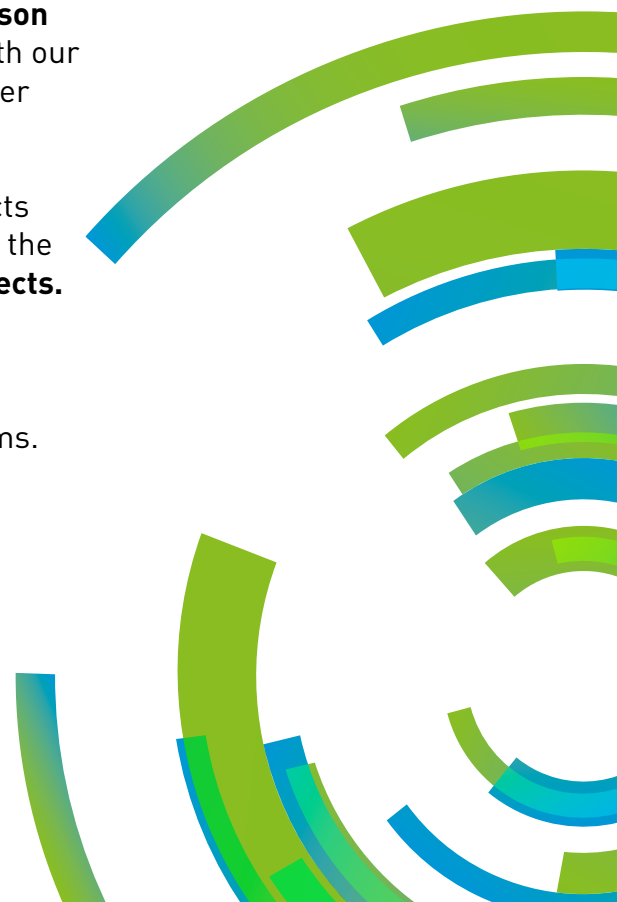

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

© Armacell, 2022. All rights reserved. Trademarks followed by ® or ™ are trademarks of the Armacell Group.

Microban is a registered trademark of Microban Products Company.

TDS | 012023 | en-IN

## ABOUT ARMACELL

---

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency, making a difference around the world every day. With more than 3200 employees and 27 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.



For more information, please visit:  
[www.armacell.com](http://www.armacell.com)