



FIRE PROTECTION JUST GOT
SMARTER

ArmaGel HTF

Flexible aerogel blanket for passive fire
protection

- // Achieves 120 minutes of fire protection according to UL1709
- // Achieves 90 minutes of fire protection according to jet fire (ISO 22899-1)
- // Fire tested configurations are representative of the intended applications
- // ASTM C1728 compliant
- // Up to five times better thermal performance than competing insulation materials
- // Mitigates the risk of corrosion under insulation (CUI)



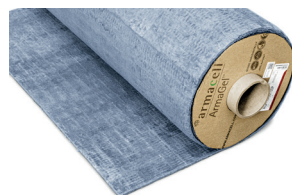

MAKING A DIFFERENCE AROUND THE WORLD

**A sustainable one-step solution for
fire protection and thermal insulation.**

ArmaGel[®] HTF

ArmaGel HTF is a new generation of aerogel fire protection blanket. A reliable solution for superior thermal insulation for high-temperature applications up to 650 °C (1200 °F). ArmaGel HTF provides additional fire protection to reduce the risk of shut-downs. Officially tested up to 120 minutes, compliant with UL 1709. ArmaGel HTF is easy to install, flexible and environmentally safe. The perfect solution for applications where both, thermal insulation and fire protection, is required.

Passive Fire Protection



Thermal



Hydrophobic



[Learn more.](#)

AEROGEL

Used by NASA to bring home a piece of a comet because it's strong enough to stop a bullet in its track, aerogel offers an uncanny array of physical properties - thermal, acoustical - and so holds incredible potential for insulation uses. As the name suggests, aerogel is a solid derived from gel in which the liquid component of the gel has been replaced with air making it dry and porous. In fact, over 90 percent of the volume is empty space making aerogel the world's lightest solid material. It's also 1,000 times less dense than glass, making it the world's lowest density solid material.

YOUR BENEFITS

// One-step solution

Advanced insulation material which additionally provides fire protection - reduce the risk of shut-downs in case of fire and protect assets.

// Fire Protection

Passive Fire Protection with aerogel technology. UL1709 compliant.

// Superior thermal Insulation

For hot conditions up to 650°C (1200°F). Up to five times better thermal performance than competing insulation materials.

// Cost efficient solution

Reduce labour cost. Reduce maintenance costs. The ideal choice for specifiers and contractors.

// CUI defence

Mitigates the risk of corrosion under insulation (CUI).

// Easy and reliable installation

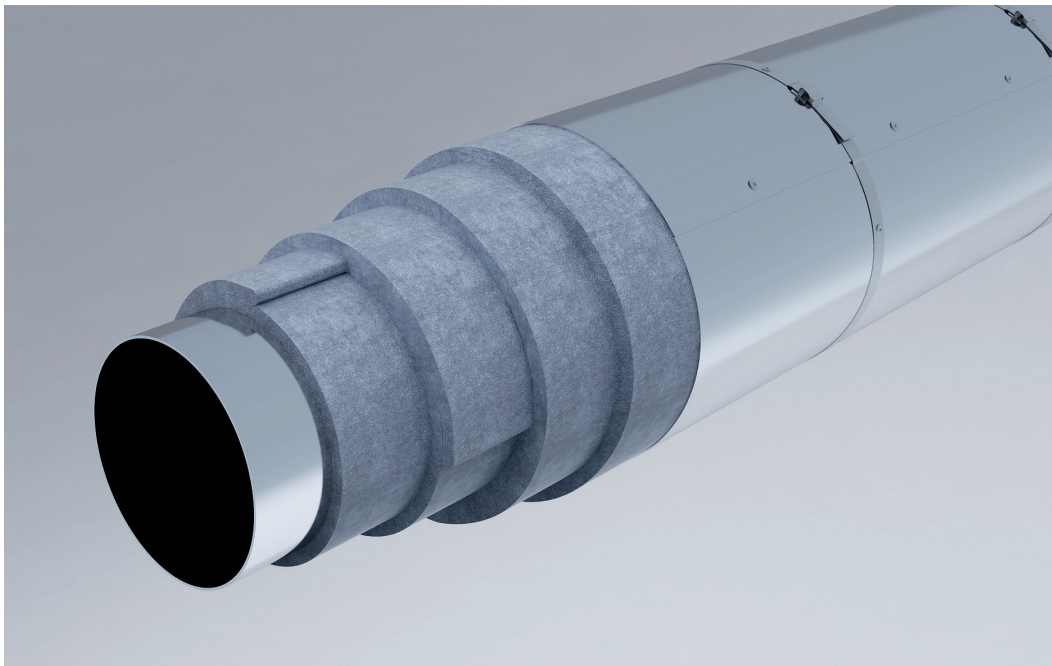
Highly flexible aerogel blanket material. No curing or drying time. No banding systems required to install ArmaGel HTF blankets.

// Hydrophobic and breathable

Repels liquid water, but allows vapour to escape, helping to keep equipment drier for longer.

// High temperature application

Fire protection for applications with operating temperature up to 650 °C.



TECHNICAL DATA - ARMAGEL HTF

Brief description	ArmaGel HTF is a flexible aerogel blanket designed for passive fire protection meeting UL 1709 standard. Jet fire tested according ISO 22899-1. ArmaGel HTF is compliant with ASTM C1728, Type III, Grade 1A.
Material type	Silica-aerogel blanket.
Product colour range	Grey
Special features	ArmaGel HTF provides excellent passive fire protection and superior thermal performance with maximum operational use temperature up to 650 °C (1200 °F).
Product range	Sheets in rolls in 10 mm (0.4 in) thickness and width of 1.5 m (59 in). For further details, please refer to the product range tables at the end of this document.
Applications	Passive fire protection and thermal insulation of pipework and equipment in Energy and industrial process facilities.
Installation	For industrial applications it is recommended to consult the relevant Armacell application manual(s). For further information please contact our Technical Services.

Property	Value / Assessment	Standard / Test method																		
Operating temperature																				
Operating temperature ^{1,2,3}	Maximum service temperature: 650 °C (1200 °F)	ASTM C411, ASTM C447																		
Thermal conductivity																				
Declared thermal conductivity ⁴	<table border="1"> <thead> <tr> <th>Øm</th> <th>24 °C</th> <th>38 °C</th> <th>93 °C</th> <th>149 °C</th> <th>204 °C</th> <th>260 °C</th> <th>316 °C</th> <th>371 °C</th> </tr> </thead> <tbody> <tr> <td>λd ≤ [W/(m·K)]</td> <td>0.021</td> <td>0.022</td> <td>0.023</td> <td>0.025</td> <td>0.029</td> <td>0.032</td> <td>0.036</td> <td>0.043</td> </tr> </tbody> </table>	Øm	24 °C	38 °C	93 °C	149 °C	204 °C	260 °C	316 °C	371 °C	λd ≤ [W/(m·K)]	0.021	0.022	0.023	0.025	0.029	0.032	0.036	0.043	ASTM C177
	Øm	24 °C	38 °C	93 °C	149 °C	204 °C	260 °C	316 °C	371 °C											
λd ≤ [W/(m·K)]	0.021	0.022	0.023	0.025	0.029	0.032	0.036	0.043												
Declared thermal conductivity ⁴	<table border="1"> <thead> <tr> <th>Øm</th> <th>75 °F</th> <th>100 °F</th> <th>200 °F</th> <th>300 °F</th> <th>400 °F</th> <th>500 °F</th> <th>600 °F</th> <th>700 °F</th> </tr> </thead> <tbody> <tr> <td>k ≤ [Btu-in/(h-ft²-°F)]</td> <td>0.14</td> <td>0.15</td> <td>0.16</td> <td>0.18</td> <td>0.20</td> <td>0.22</td> <td>0.25</td> <td>0.30</td> </tr> </tbody> </table>	Øm	75 °F	100 °F	200 °F	300 °F	400 °F	500 °F	600 °F	700 °F	k ≤ [Btu-in/(h-ft ² -°F)]	0.14	0.15	0.16	0.18	0.20	0.22	0.25	0.30	ASTM C177
Øm	75 °F	100 °F	200 °F	300 °F	400 °F	500 °F	600 °F	700 °F												
k ≤ [Btu-in/(h-ft ² -°F)]	0.14	0.15	0.16	0.18	0.20	0.22	0.25	0.30												
Temperature resistance																				
Hot surface performance ⁵	Pass	ASTM C411																		
Linear shrinkage under soaking heat	< 2% in width and length // Pass	ASTM C356																		
Fire Performance and Approvals																				
Surface burning characteristics	Flame spread index ≤ 5 Smoke developed index ≤ 10	ASTM E84																		
Passive fire protection																				
Passive fire protection ⁶	In passive fire protection applications the outer layer of the material must be protected with an adequate metal jacketing. Please contact Technical Services for guidance.																			

UL standards						
Fire resistance ^{6,7,8}	Tested configurations for UL1709 compliance :					UL 1709, ISO 22899-1
	Tested configuration	Fire rating	Outer diameter [min.]	Wall thickness [mm]	Hp/A Value [m⁻¹]	ArmaGel® HTF [mm]
	Pipe 8"	120	219.1	3.68	276.4	10 x 10mm
	Pipe 8"	120	219.1	6.3	163.4	7 x 10mm
	Pipe 8"	120	219.1	14.2	74.8	4 x 10mm
	Pipe 8"	90	219.1	6.3	163.4	5 x 10mm
	Standard steel beam W10x49 (in x lb/ft)	120	-	-	177.3	3 x 10mm
	Tested configurations for jet fire compliance (ISO 22899-1) :					
	Tested configuration	Fire rating	Outer diameter [min.]	Wall thickness [mm]	Hp/A Value [m⁻¹]	ArmaGel® HTF [mm]
	Pipe 8"	90	219.1	6.3	163.4	5 x 10mm

Property	Value / Assessment	Standard / Test method
Resistance to water vapour		
Water vapour sorption	≤ 5% by weight	ASTM C1104
Resistance to water		
Hydrophobic	Yes	
Water absorption	≤ 8% by weight	ASTM C1763
Corrosion mitigation		
Corrosiveness to steel	Passed, Mass Loss Corrosion Rate (MLCR) not exceeding that of 5 ppm chloride solution on carbon steel coupon	ASTM C1617, Procedure A
Stress corrosion cracking	Insulation for use over austenitic steel: no cracks, passed	ASTM C692, ASTM C795
Mechanical properties		
Compressive strength ⁹	≥3 psi/ 20.7 kPa at 10% compression	ASTM C165
Flexibility of insulation blankets	Flexible	ASTM C1101
Weather and UV resistance		
Weather resistance	In all industrial applications the outer layer of the material must be protected with an adequate covering like metal jacketing. Please contact Technical Services for guidance.	
Health and environment		
Fungal growth	No growth	ASTM C1338
Health aspects	Neutral, asbestos free.	
Other technical features		
Shelf life ¹⁰	Max. 3 years	
Storage	Material shall be stored indoors, in clean and dry conditions, away from direct sunlight.	

¹ For temperatures below or above those published please contact Technical Services to request the corresponding technical information.

² For operating temperatures above 400 °C (752 °F) a metallic foil barrier with 0.05 mm (0.002 inch) thickness must be additionally installed between the two outmost layers of ArmaGel HTF. For details please contact Technical Services.

³ For live line installations please refer to the ArmaGel HTF application guide.

⁴ Measured under a load of 1.5 kPa (0.22 psi).

⁵ For operating temperatures above 400 °C (752 °F) a metallic foil barrier with 0.05 mm (0.002 inch) thickness must be additionally installed. For details please contact Technical Services.

⁶ All UL fire tests have been officially conducted at a UL laboratory under full witnessing by UL.

⁷ For the installation procedure for standard steel beams please contact Technical Services for guidance.

⁸ The jet fire test has been officially conducted at a Efectis /France laboratory under full witnessing by Efectis and UL. Fire rating for test criteria (temperature increase on steel pipe below <538°K) was 90 minutes. No integrity failure was noticed during the full test period of 180 minutes.

⁹ Test performed with a preload of 13.8 kPa (2 psi).

¹⁰ Shelf life (maximum storage time) is limited to ensure that only currently manufactured products are installed on projects. This limitation is restricted solely to storage of the product and does not affect the lifetime of product after it has been installed.



All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our [Data Protection Policy](#).

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

TDS | 052024 | en-PH

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

For more information, please visit:
www.armacell.com


MAKING A DIFFERENCE AROUND THE WORLD