



INSTALL IT. TRUST IT.

# HT/ArmaFlex

Flexible elastomeric insulation material specially purposed for high temperature applications

- // Professional solution for high temperature applications up to +150 °C
- // UL approved
- // System approach with fit-for-purpose ArmaFlex HT625 Adhesive

[www.armacell.co.th](http://www.armacell.co.th)





 **armacell**<sup>®</sup>  
MAKING A DIFFERENCE AROUND THE WORLD

INSTALL IT. TRUST IT.

---

# HT/ArmaFlex

## THE EXPERT FOR HIGH TEMPERATURE

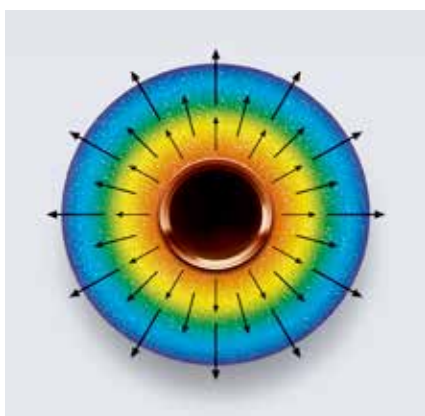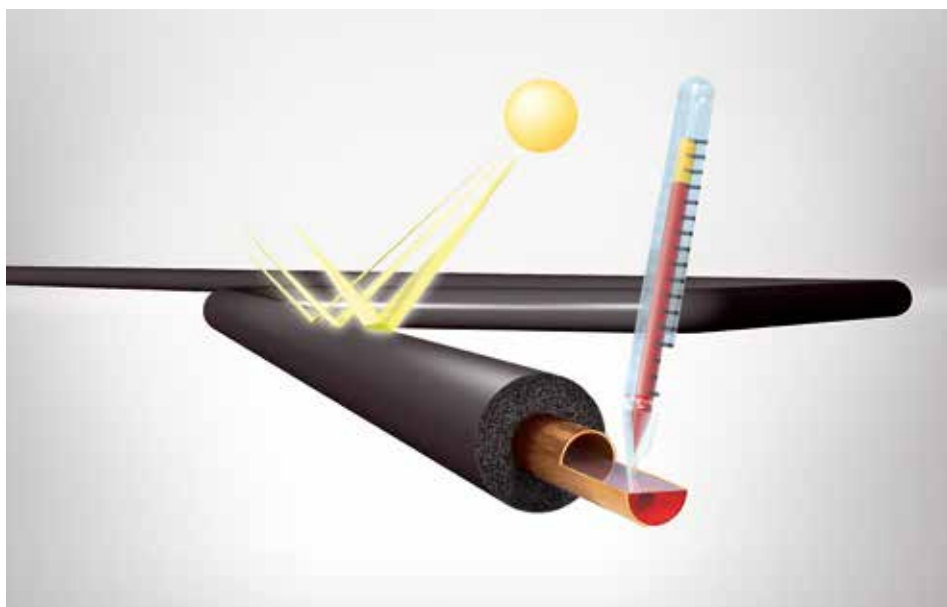

HT/ArmaFlex® is a flexible elastomer insulation material with exceptional resistance to UV radiation and high temperatures. Its closed cell structure and low thermal conductivity keep water vapour from diffusing in and reduce energy losses, protecting and optimising the efficiency and life time expectancy of the installation. While remaining flexible at application temperatures of up to 150°C, HT/ArmaFlex® is dust and fibre free and easy to install without special tools. The product does not need additional jacketing, does not degrade in sunlight and withstands incidental oil contact.

Thanks to the thermal properties of the insulation, the heat flow from pipelines insulated with HT/ArmaFlex® is kept at its utmost minimum. The evenly spread, homogenous and longterm stable closed cell structure prevents heat flow on the way of convection, ensuring very low thermal conductivity of the insulation material. This to keep the outer surface temperature at a low level and prevents unnecessary heat losses. Because of the flexibility of HT/ArmaFlex®, the huge temperature gradient of the thickness of insulation does not result in any internal stress.

## TECHNICAL DATA - HT/ARMAFLEX

Brief description	HT/ArmaFlex is a highly flexible, closed-cell insulation material with resistance to UV radiation.
Material type	Factory-made flexible elastomeric foam based on ethylene propylene diene methylene (EPDM), according to EN 14304.
Product colour range	Black
Special features	UV resistance testing regarding of these materials showed excellent results. When used on outdoor applications, the materials showed very good durability even under UV exposure. However, due to the unpredictable nature of outdoor conditions in the whole variety of thinkable installations, there might be occasional weathering influences on the consistence of the material, which cannot be tested in advance. Therefore, installations in extreme environments (regions of extreme weather conditions like high mountains etc.) cannot be recommended. In case of doubt, please contact our Customer Service.
Applications	Thermal insulation of pipes, vessels and ducts in solar collectors (including outdoors), motor vehicles, hot gas lines, steam lines and dual temperature lines.
Installation	Please refer to the ArmaFlex application manual and more information is available in Armacell's Technical Bulletin No. 71. Use ArmaFlex HT625 adhesive for a reliable and seamless installation.

Property	Value / Assessment		Standard / Test method
<b>Temperature range</b>			
Service temperature <sup>1,2</sup>	Range	Min. °C	EN 14706, EN 14707, EN 14304
	Full range	-50	
<b>Thermal conductivity</b>			
Declared thermal conductivity	θm	40°C	EN ISO 13787, EN 12667, EN ISO 8497
	λd ≤ [W/(m·K)]	0.042	
	Range	Tubes	
	Formula	$\lambda = [36.92 + 0.125 \cdot \theta_m + 0.0008 \cdot (\theta_m - 30)^2] / 1000$	
Declared thermal conductivity	θm	40°C	EN ISO 8497, EN ISO 13787, EN 12667
	λd ≤ [W/(m·K)]	0.045	
	Range	Sheets / Tapes	
	Formula	$\lambda = [39.92 + 0.125 \cdot \theta_m + 0.0008 \cdot (\theta_m - 30)^2] / 1000$	
<b>Fire Performance and Approvals</b>			
Reaction to fire	D(L)-s3,d0 (tubes) D-s3,d0 (sheets, tape)		EN 13501-1, EN ISO 11925-2, EN 13823
<b>UL standards</b>			
UL 94 V-0 <sup>4</sup>	Pass		IEC 60695-11-10
<b>Fire performance</b>			
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames.		
Others	Class 1		BS 476 Part 7
<b>Resistance to water vapour</b>			
Water vapour diffusion resistance factor	≥ 4000 (tubes) ≥ 3000 (sheets, tapes)		EN 12086, EN 13469
<b>Physical attributes</b>			
Dimensions and tolerances	In accordance with EN 14304, table 1.		EN 822, EN 823, EN 13467
<b>Weather and UV resistance</b>			
UV resistance <sup>5</sup>	Very good		EN ISO 4892-2

Property	Value / Assessment	Standard / Test method
<b>Health and environment</b>		
Volatile organic compounds (VOC) content	Fulfills all VOC requirements (French, Italian, Belgian, German AgBB, Blauer Engel and Eurofins Indoor Air Comfort GOLD).	ISO 16000 Parts 3, 6 & 9
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20200222-IBA1-EN", Institut Bauen und Umwelt e.V. (IBU)	
Green building assessment	Meets the sustainable construction requirements for LEED v4.1, BREEAM international, WELL v2 and DGNB.	
Additional features	SCCP, MCCP-free	
<b>Other technical features</b>		
AGI designation code	Tubes: 36.12.05.09.02 Sheets: 36.07.05.09.02	
Shelf life <sup>6</sup>	Tape, self-adhesive: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0°C to 35°C).	

<sup>1</sup>For temperatures above +125 °C or below -50 °C, please contact our Customer Service Centre to request for the corresponding technical information.

<sup>2</sup>At high service temperatures, a certain hardening process may start on the inner surface of the material. Investigations have shown that these changes have no impact on the good physical and fire protection properties of the material, provided the material is installed in a correct way with all its joints properly sealed. For specific applications please consult our technical service.

<sup>3</sup>+85 °C, for products with a self-adhesive layer.

<sup>4</sup>Only for products without self-adhesive-layer.

<sup>5</sup>Extended exposure to certain conditions could result in aesthetic changes to insulation material. This includes examples such as minor discolouration, surface cracks or hardening of inner surface material due to extended exposure to high service line temperatures. These physical changes do not affect the technical performance of the insulation material, such as thermal conductivity and behaviour in case of a fire. For further information, please contact our Technical Service department.

<sup>6</sup>Shelf life (maximum storage time) is limited to ensure that only currently manufactured products are installed on projects. This limitation is restricted solely to storage of the product and does not affect the lifetime of product after it has been installed.

Tube – standard. 2m Length.

10 mm						
Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	NRF	EAN	Content [metric]
10	HT-10X010	11	14	9455878	7612207121032	192 m
12	HT-10X012	13	16	9455879	7612207121056	172 m
15	HT-10X015	16	19	9455881	7612207121070	144 m
18	HT-10X018	19	22	9455882	7612207121087	130 m
22	HT-10X022	23	26	9455883	7612207121100	108 m
28	HT-10X028	29	32	9455884	7612207121131	82 m
35	HT-10X035	36	39	9455885	7612207121155	60 m
42	HT-10X042	43	46	9455886	7612207121162	50 m

Other information

Thickness tolerance 10 - 13 mm ± 1,5 mm  
19 - 25 mm ± 2,5 mm

Length tolerance ± 1,5 %

Tube – standard. 2m Length.

13 mm						
Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	NRF	EAN	Content [metric]
10	HT-13X010	11	14	9455894	7612207121261	140 m
12	HT-13X012	13	16	9455895	7612207121278	130 m
15	HT-13X015	16	19	9455896	7612207121285	112 m
18	HT-13X018	19	22	9455897	7612207121292	98 m
22	HT-13X022	23	26	9455898	7612207121322	84 m
28	HT-13X028	29	32	9455899	7612207121353	64 m
35	HT-13X035	36	39	9455901	7612207121377	50 m
42	HT-13X042	43	46	9455902	7612207121391	40 m
48	HT-13X048	49	52	9455903	7612207121414	32 m
54	HT-13X054	55	58	9455904	7612207121438	32 m
60	HT-13X060	61	64	9455906	7612207121452	28 m
76	HT-13X076	77	80	9455907	7612207121476	24 m
89	HT-13X089	90	93	9455908	7612207121490	18 m

Other information

Thickness tolerance 10 - 13 mm ± 1,5 mm  
19 - 25 mm ± 2,5 mm

Length tolerance ± 1,5 %

Tube – standard. 2m Length.

19 mm						
Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	NRF	EAN	Content [metric]
12	HT-19X012	13	16	9455909	7612207121520	80 m
15	HT-19X015	16	19	9455911	7612207121537	64 m
18	HT-19X018	19	22	9455912	7612207121551	58 m
22	HT-19X022	23	26	9455913	7612207121575	50 m

Tube – standard. 2m Length.

19 mm						
Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	NRF	EAN	Content [metric]
28	HT-19X028	29	32		7612207121605	48 m
35	HT-19X035	36	39	9455915	7612207121612	32 m
42	HT-19X042	43	46	9455916	7612207121629	24 m
48	HT-19X048	49	52	9455917	7612207121636	22 m
54	HT-19X054	55	58	9455918	7612207121643	18 m
60	HT-19X060	61	64	9455921	7612207121667	16 m
64	HT-19X064	65	68		7612207469158	16 m
76	HT-19X076	77	80	9455922	7612207121681	18 m
89	HT-19X089	90	93	9455923	7612207121698	16 m

Other information

Thickness tolerance 10 - 13 mm ± 1,5 mm  
19 - 25 mm ± 2,5 mm

Length tolerance ± 1,5 %

Tube – standard. 2m Length.

25 mm						
Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	NRF	EAN	Content [metric]
15	HT-25X015	16	19		7612207121735	40 m
18	HT-25X018	19	22		7612207121742	36 m
22	HT-25X022	23	26	9455927	7612207121759	36 m
28	HT-25X028	29	32	9455928	7612207121773	32 m
35	HT-25X035	36	39	9455929	7612207121780	24 m
42	HT-25X042	43	46		7612207121797	20 m
48	HT-25X048	49	52		7612207121803	16 m
54	HT-25X054	55	58		7612207121810	16 m
60	HT-25X060	61	64		7612207121834	16 m
76	HT-25X076	77	80	9455936	7612207121841	12 m
89	HT-25X089	90	93	9455937	7612207121858	12 m

Other information

Thickness tolerance 10 - 13 mm ± 1,5 mm  
19 - 25 mm ± 2,5 mm

Length tolerance ± 1,5 %

Roll - standard

Item	Thickness [mm]	Width (m)	Length [m]	Content [metric]
HT-10-99/E	10	1	10	10 m <sup>2</sup>
HT-13-99/E	13	1	8	8 m <sup>2</sup>
HT-19-99/E	19	1	6	6 m <sup>2</sup>
HT-25-99/E	25	1	4	4 m <sup>2</sup>
HT-32-99/E	32	1	3	3 m <sup>2</sup>

Other information

**Roll - standard**

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
Thickness tolerance	10 - 19 mm $\pm$ 1,5 mm 25 - 32 mm $\pm$ 2,0 mm			
Length tolerance	+ 5 % - 1,5 %			

**Coil**

13 mm					19 mm				
Pipe $\varnothing$ [mm]	Item	Length [m]	EAN	Content [metric]	Pipe $\varnothing$ [mm]	Item	Length [m]	EAN	Content [metric]
15	HT-13X015/E	26	7612207235753	26 m	15	HT-19X015/E	16	7612207235784	16 m
18	HT-13X018/E	22	7612207235760	22 m	18	HT-19X018/E	14	7612207235791	14 m
22	HT-13X022/E	18	7612207235777	18 m	22	HT-19X022/E	12	7612207235807	12 m

**Other information**

Thickness tolerance	10 - 13 mm $\pm$ 1,5 mm 19 - 25 mm $\pm$ 2,5 mm
Length tolerance	$\pm$ 1,5 %

**Tape - insulation**

Item	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
HT-TAPE	3	50	15	12 roll

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by ® or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaFlex | HT/ArmaFlex | Brochure | 052024 | en-TH

## ABOUT ARMACELL

---

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

For more information, please visit:  
[www.armacell.com](http://www.armacell.com)

  
MAKING A DIFFERENCE AROUND THE WORLD